

SrTiO₃/TiO₂ composite electron transport layer for perovskite solar cells

著者別名	鈴木 義和
journal or publication title	Materials letters
volume	187
page range	111-113
year	2017-01
権利	(C) 2017. This manuscript version is made available under the CC-BY-NC-ND 4.0 license http://creativecommons.org/licenses/by-nc-nd/4.0/
URL	http://hdl.handle.net/2241/00145273

doi: 10.1016/j.matlet.2016.10.090

SrTiO₃/TiO₂ composite electron transport layer for perovskite solar cells

Yuji Okamoto^a, Ryuta Fukui^b, Motoharu Fukazawa^b, and Yoshikazu Suzuki^{a,c*}

^a Graduate School of Pure and Applied Sciences, University of Tsukuba, Ibaraki 305-8573, Japan

^b Denka Innovation Center, Denka Co. Ltd., Tokyo 194-8560, Japan

^c Faculty of Pure and Applied Sciences, University of Tsukuba, Ibaraki 305-8573, Japan

Supplement

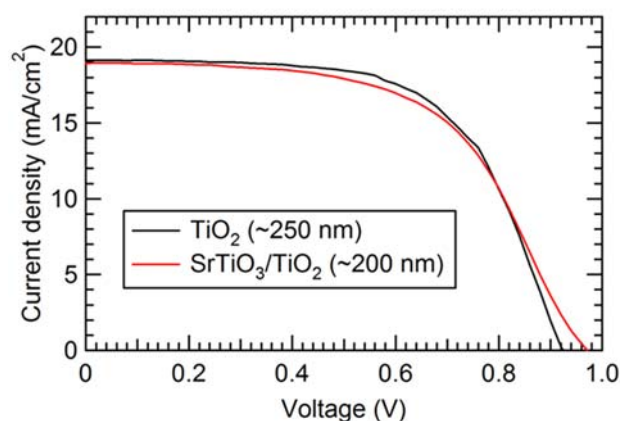


Fig. S1 The J - V curves of the best performance solar cells for TiO₂ (~250 nm) and SrTiO₃/TiO₂ (~200 nm)

Table S1 The J - V characteristics of the best performance solar cells for TiO₂ (~250 nm) and SrTiO₃/TiO₂ (~200 nm)

Samples	J_{SC} (mA/cm ²)	V_{OC} (V)	FF	η (%)	R_s (Ω)
TiO ₂ (~250 nm)	19.1	0.92	0.61	10.9	11.1
SrTiO ₃ /TiO ₂ (~200 nm)	18.9	0.97	0.58	10.6	18.8

* Corresponding Author

E-mail: suzuki@ims.tsukuba.ac.jp

Tel: +81-29-853-5026 / Fax: +81-29-853-4490