

# Overview of Biodiesel Production from Microalgae

Kenji Takisawa<sup>1</sup>, Kazuyo Kanemoto<sup>2</sup>, Muliastari Kartikawati<sup>2</sup> and Yutaka Kitamura<sup>3\*</sup>

<sup>1</sup> Graduate School of Agricultural Science, Tohoku University, 232-3,  
Yomogida, Naruko-onsen, Osaki, Miyagi, 989-6711, Japan

<sup>2</sup> Research Institute of Tsukuba Bio-tech Corporation, 2-10-1 Matsushiro, Tsukuba, Ibaraki 305-0035, Japan

<sup>3</sup> Faculty of Life and Environmental Sciences, University of Tsukuba,  
1-1-1 Tennodai, Tsukuba, Ibaraki 305-8572, Japan

Biodiesel is a renewable fuel that is produced from oils derived from plants, animals, or microbes. It is nontoxic and biodegradable. Various methods such as transesterification, blending, cracking, microemulsification, and pyrolysis have been developed to convert oils from biological sources into biodiesel that is comparable to diesel fuel. Transesterification, by a number of consecutive reversible reactions, is the most common method: triglycerides are converted stepwise to diglycerides, monoglycerides, and finally glycerol, with the liberation of fatty acid methyl ester defined as biodiesel at each step. Generally, an alcohol and a catalyst are needed for transesterification of triglycerides.

Microalgae are microscopic (2–200  $\mu\text{m}$ ), autotrophic organisms that can grow by photosynthesis. Most are eukaryotes, but the prokaryotic cyanobacteria are often included. Some microalgae contain more than 70% (w/w, dry basis) lipids. Microalgae grow extremely rapidly under optimal conditions and can grow 100 times faster than terrestrial plants. The oil yield from microalgae containing 30% oil content is 58700 L ha<sup>-1</sup> year<sup>-1</sup>, which is much higher than that from other crops (e.g., 636 L ha<sup>-1</sup> year<sup>-1</sup> for soybean and 5366 L ha<sup>-1</sup> year<sup>-1</sup> for oil palm). Importantly, microalgal cultivation need not encroach on arable land suitable for food production.

Currently, there are several areas of research on transesterification of microalgal oil. The conversion efficiency of biodiesel production via transesterification depends on microalgal characteristics, amount and type of alcohol used, catalyst, operating temperature, and reaction time. This study reviews the technologies that generate biodiesel from microalgae by transesterification. The relative performances of alkaline, acidic, and enzymatic catalysts are evaluated. New techniques used in biodiesel production, e.g., methods using microwaves and supercritical solutions, are discussed.

**Key words:** microalgae, biodiesel, transesterification, catalyst



---

## 1. Introduction

Climate change is the most critical global environmental problem. The potential threat of global climate change has increased, and much of the risk has been attributed to greenhouse gas (GHG) emissions by fossil fuel usage (Wuebbles *et al.*, 2001). It has become necessary to develop techniques and to adopt policies to minimize impacts of global warming that result from the increase in anthropogenic GHG emis-

sions. In 1997, the Kyoto Protocol called for a 5.2% reduction in GHG emissions from 1990 levels (Wang *et al.*, 2008), and various technologies have been investigated to meet this goal. Another problem is a future energy crisis due to depletion of fossil fuels. The continuous use of fossil fuels as a primary source of energy is widely recognized to be unsustainable (Khan *et al.*, 2009). Therefore, it is absolutely necessary to ensure new energy resources before the world is confronted with an energy crisis.

Biodiesel is a widely known alternative fuel. It can be produced from oils derived from plants, animals, or microbes (Graboski and McCormick, 1998), and currently represents 82% of total biofuel production (Bozbas, 2008). Biodiesel is usually defined as the monoalkyl esters of long-chain fatty acids derived from transesterification of renewable feedstocks (Meher *et al.*, 2006). Transesterification consists of a number of consecutive reversible reactions (Freedman *et al.*, 1986). Triglycerides (or triacylglycerols: TAGs) are commonly reacted with methanol and are converted stepwise to diglycerides, monoglycerides, and finally glycerol, as shown in equations 1 and 2. From 1 mole of starting TAG, 1 mole of fatty acid methyl ester (FAME) is liberated at each step.

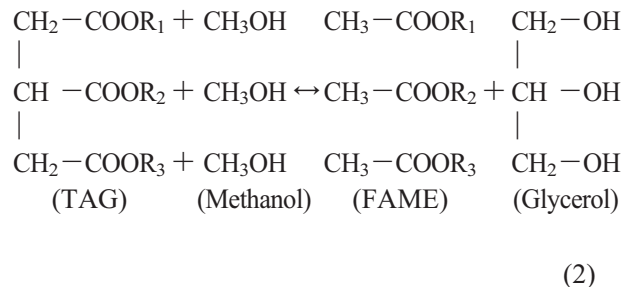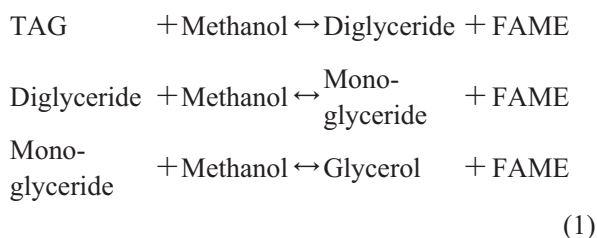

There are several reasons why biodiesel is an attractive renewable energy: it is biodegradable and has low toxicity; it can be used in existing diesel engines with little or no modification (Demirbas, 2002); and it can be blended in any ratio with traditional petroleum-based diesel fuel (Peterson, 1991). On the other hand, there are some drawbacks in the current biodiesel production technology: the area of crops for biodiesel production is growing, potentially resulting in the destruction of natural habitats and competing with food production (Janaun and Elis, 2010). Therefore, new feedstocks are needed to meet demand.

## 2. Microalgae as a biodiesel feedstock

### 2.1 Microalgal diversity

Microalgae are defined as prokaryotic or eukaryotic

thallophytes that lack a sterile covering of cells around the reproductive cells and have chlorophyll *a* as a photosynthetic pigment (Lee, 1980). Microalgae are present in a wide range of environments, and it is estimated that more than 50000 species exist (Richmond, 2004). Prokaryotic microalgae (cyanobacteria, blue-green algae) lack membrane-bound organelles and are more similar to bacteria than to algae. In contrast, the cells of eukaryotic microalgae have organelles that control the functions of the cell (Brennan and Owende, 2010). Eukaryotic microalgae are categorized into a variety of classes defined mainly by their pigmentation, life cycle, and basic cellular structure (Khan *et al.*, 2009). The most important classes include green algae, red algae, and diatoms. Algae can be autotrophic or heterotrophic, and some are mixotrophic (Lee, 1980).

### 2.2 TAG biosynthesis in microalgae

Microalgae synthesize and store TAGs, which are their main lipids, under stress conditions, such as when their nitrogen supply is exhausted, and when an excess supply of carbon is assimilated. They store the TAGs as a carbon energy reserve within cells that can no longer divide (Meng *et al.*, 2009). The route of TAG biosynthesis consists of three steps: (a) the conversion of acetyl-CoA to malonyl-CoA; (b) the elongation and desaturation of the carbon chain of fatty acids; and (c) the biosynthesis of TAG (Huang *et al.*, 2010).

The conversion of acetyl-CoA and CO<sub>2</sub> into malonyl-CoA occurs in two steps and is catalyzed by an enzyme complex (Hu *et al.*, 2008). First, CO<sub>2</sub> is transferred to nitrogen by the biotin carboxylase prosthetic group of acetyl-CoA carboxylase. In the next step, the activated CO<sub>2</sub> is transferred from biotin to acetyl-CoA to form malonyl-CoA, which is catalyzed by carboxyltransferase (Ohlrogge and Browne, 1995). The fatty acid elongation condenses malonyl-CoA molecules and acetyl-CoA; after several repeated reaction steps, the ACP-thioesterase cleaves the acyl chain and liberates the fatty acid (Courchesne *et al.*, 2009). The biosynthesis of TAG is performed by the condensation of glycerol-3-phosphate with acyl-CoA to form lysophosphatidic acid, which is catalyzed by glycerol-3-phosphate acyltransferase. After this reaction, phosphatidic acid, diacylglycerol and TAG are synthesized by a series of catalytic reactions.

**Table 1.** Lipid contents and productivities of different microalgae species (Mata *et al.*, 2010).

Marine and freshwater microalgae species	Lipid content (% dry weight biomass)
<i>Ankistrodesmus</i> sp.	24.0–31.0
<i>Botryococcus braunii</i>	25.0–75.0
<i>Chaetoceros muelleri</i>	33.6
<i>Chlorella emersonii</i>	25.0–63.0
<i>Chlorella protothecoides</i>	14.6–57.8
<i>Chlorella sorokiniana</i>	19.0–22.0
<i>Chlorella vulgaris</i>	5.0–58.0
<i>Chlorella</i> sp.	10.0–48.0
<i>Chlorella pyrenoidosa</i>	2.0
<i>Chlorella</i>	18.0–57.0
<i>Chlorococcum</i> sp.	19.3
<i>Cryptocodinium cohnii</i>	20.0–51.1
<i>Dunaliella salina</i>	6.0–25.0
<i>Dunaliella primolecta</i>	23.1
<i>Dunaliella tertiolecta</i>	16.7–71.0
<i>Dunaliella</i> sp.	17.5–67.0
<i>Ellipsoidion</i> sp.	27.4
<i>Euglena gracilis</i>	14.0–20.0
<i>Haematococcus pluvialis</i>	25.0
<i>Isochrysis galbana</i>	7.0–40.0
<i>Isochrysis</i> sp.	7.1–33
<i>Monodus subterraneus</i>	16.0
<i>Monallanthus salina</i>	20.0–22.0
<i>Nannochloris</i> sp.	20.0–56.0
<i>Nannochloropsis oculata</i> .	22.7–29.7
<i>Nannochloropsis</i> sp.	12.0–53.0
<i>Neochloris oleoabundans</i>	29.0–65.0
<i>Nitzschia</i> sp.	16.0–47.0
<i>Oocystis pusilla</i>	10.5
<i>Pavlova salina</i>	30.9
<i>Pavlova lutheri</i>	35.5
<i>Phaeodactylum tricornutum</i>	18.0–57.0
<i>Scenedesmus obliquus</i>	11.0–55.0
<i>Scenedesmus quadricauda</i>	1.9–18.4
<i>Scenedesmus</i> sp.	19.6–21.1
<i>Skeletonema</i> sp.	13.3–31.8
<i>Skeletonema costatum</i>	13.5–51.3
<i>Spirulina platensis</i>	4.0–16.6
<i>Spirulina maxima</i>	4.0–9.0
<i>Thalassiosira pseudonana</i>	20.6
<i>Tetraselmis suecica</i>	8.5–23.0
<i>Tetraselmis</i> sp.	12.6–14.7

**Table 2.** Comparison of microalgae with other biodiesel feedstocks (Mata *et al.*, 2010).

Plant source	Oil content (% dry weight biomass)	Oil yield (L oil/ha year)	Land use (m <sup>2</sup> year/kg biodiesel)
Corn	44	172	66
Hemp	33	363	31
Soybean	18	636	18
Jatropha	28	741	15
Camelina	42	915	12
Canola/Rapeseed	41	974	12
Sunflower	40	1070	11
Castor	48	1307	9
Palm oil	36	5366	2
Microalgae (low oil content)	30	58,700	0.2
Microalgae (medium oil content)	50	97,800	0.1
Microalgae (high oil content)	70	136,900	0.1

### 2.3 Microalgal advantages


Microalgae offer many advantages as a biodiesel feedstock. The most important one is their higher growth rates and oil productivity than conventional crops (Minowa *et al.*, 1995). Generally, microalgae have oil levels in the range of 20% to 50% (w/w, dry basis) (Table 1), but higher levels can be reached (Mata *et al.*, 2010). Microalgae commonly double their biomass within 24 h, and cells divide as frequently as every 3.5 h during the exponential growth phase (Chisti, 2007). Oil yield is 58700 L ha<sup>-1</sup> year<sup>-1</sup> for microalgae containing 30% oil, compared with 636 L ha<sup>-1</sup> year<sup>-1</sup> for soybean and 5366 L ha<sup>-1</sup> year<sup>-1</sup> for oil palm (Table 2; Mata *et al.*, 2010). If microalgae contain 70%, 136 900 L oil ha<sup>-1</sup> year<sup>-1</sup> can be produced (Mata *et al.*, 2010). In terms of cultivation area, microalgae are clearly advantageous over land plants because of their higher biomass productivity and oil yield, and they do not compete for land with crops used for food, fodder, and other products (Huang *et al.*, 2010). Microalgae can be grown in a number of environments that are unsuitable for growing other crops, such as fresh, brackish, or salt water or non-arable lands (Patil *et al.*, 2008). CO<sub>2</sub>, which is essential to autotrophic cultivation of microalgae, can be provided by industrial facilities such as power plants and boilers, where the CO<sub>2</sub> concentration in emitted gases may reach 15% (v/v) (Salih, 2011; Zhao *et al.*, 2011). Microalgae can also be used to treat wastewater, removing nitrogen and phosphorus efficiently (Mallick, 2002) and generating

an environmental benefit. Furthermore, microalgae produce valuable co-products or by-products such as biopolymers, proteins, carbohydrates, and residual biomass. They can be used as energy sources through the generation of ethanol and methane by fermentation, and can be supplied as livestock feed and fertilizer owing to their high N:P ratio. They can also produce a variety of chemical products such as pharmaceuticals and platform chemicals; highly unsaturated fatty acids such as docosahexaenoic acid (Molina Grima *et al.*, 2003); proteins and carbohydrates, which can be used as gross nutrients (Knuckey *et al.*, 2006); specific compounds such as pigments (Lorenz and Cysewski, 2000); and silica derived from diatom cell walls (Gordon *et al.*, 2009).

## 3. Biodiesel production from microalgae

### 3.1 Traditional biodiesel production from microalgae

Biodiesel production from microalgae requires several steps (Fig. 1). In the cultivation step, it is important to consider different factors that influence algal growth: light, temperature, nutrient concentration, CO<sub>2</sub> supply, pH, salinity, contamination, and so on. Harvested microalgae are concentrated by sedimentation, centrifugation, flocculation, or membrane filtration. Although centrifugation is often used, energy consumption is high. The developments of more cost-viable and energy-efficient methods are needed. After the harvested biomass is dried, cells are disrupted and the oil is extracted. Three common methods are

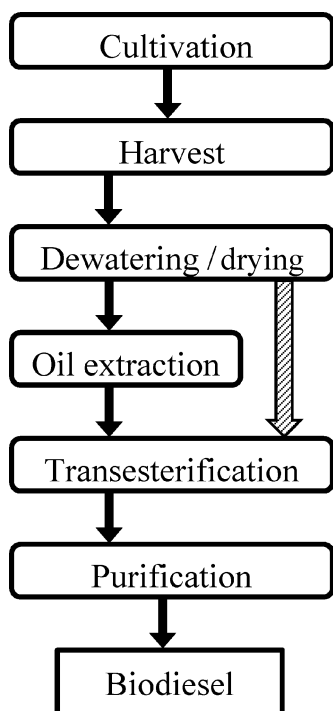

**Fig. 1.** Steps for biodiesel production from microalgae. In some procedures, the oil extraction step before transesterification is bypassed (hatched arrow).

used to extract oil from microalgae: expeller/press, solvent extraction, and supercritical fluid extraction. Currently, the most popular extraction method is Soxhlet extraction using hexanes as a solvent. The extracted oil is converted to biodiesel through transesterification, and the crude biodiesel is purified into the final biodiesel product.

### 3.2 Direct transesterification of microalgal lipids

Currently, the most common method for the production of biodiesel from microalgae involves the extraction of lipids using organic solvents (e.g., hexanes, chloroform, methanol), followed by transesterification to generate FAME. This is the traditional method used with terrestrial feedstock such as soybean or rapeseed. However, the rigid cell walls of microalgae prevent the efficient extraction of oil: mechanical crushing of algal biomass to extract oil is not easily performed using existing crushing equipment. Also, life cycle analysis showed that 90% of the process energy is consumed by oil extraction, indicating that any improvement in lipid extraction will have a significant impact on the economics of the process (Lardon *et al.*, 2009). Therefore, the extrac-


tion of lipids from microalgae and their conversion to biodiesel in a single step would be highly valuable, as it would bypass the use (and cost) of large quantities of organic solvents and the distillation cost of solvent recovery (Fig. 1).

Alcohol can be used simultaneously for the extraction of oil and as an acyl acceptor for transesterification. Such direct transesterification can simplify the conversion process, potentially reducing the overall cost and hence the final fuel product cost. Direct transesterification has been used to determine the fatty acid composition of lipid-containing tissues (Lepage and Roy, 1984; Park and Goins, 1994; Rodríguez-Ruiz *et al.*, 1998), and it can result in greater FAME yield than extraction followed by transesterification (Lepage and Roy, 1984; Siler-Marinkovic and Tomasevic, 1998; Lewis *et al.*, 2000). The direct approach has been shown to be effective in making biodiesel from both pure (Johnson and Wen, 2009; Vicente *et al.*, 2009) and mixed cultures of microorganisms (Dufreche *et al.*, 2007; Mondala *et al.*, 2009). This method confirmed that TAGs, free fatty acids (FFAs), and phospholipids all contributed to the formation of FAME (Wahlen *et al.*, 2011). Furthermore, it could reduce process wastes and pollution (Haas *et al.*, 2007).

## 4. Direct transesterification methods

### 4.1 Alkaline catalysis

There are few studies of direct transesterification using homogeneous alkaline catalysts (Xu and Mi, 2011; Velasquez-Orta *et al.*, 2012; Velasquez-Orta *et al.*, 2013). Many microalgae have a high FFA content. FFA reacts with an alkaline catalyst to form soap, which consumes the catalyst and results in a low transesterification yield, as shown in equation 3 (Al-Zuhair, 2007):

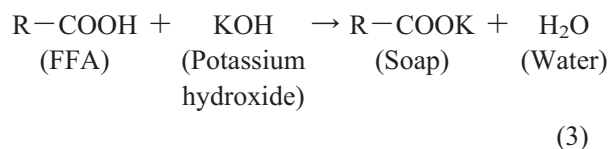


Therefore, alkaline catalysts are usually not recommended for direct transesterification from microalgae. However, if the microalgae have a low FFA content, alkaline catalysis is more suitable than acidic catalysis because it proceeds faster. Alkaline catalysts are also less corrosive to equipment than acidic catalysts (Freedman *et al.*, 1986). Furthermore, alka-

line catalysis has a higher tolerance for water than acidic catalysis (Kusdiana and Saka, 2004). Moreover, the sole study of direct transesterification using a heterogeneous catalyst reported a maximum conversion of 28% for transesterification of dried *Nannochloropsis* sp. by reacting the microalgae with 10% (w/w) alkaline heterogeneous catalyst (Mg-Zr) in methanol: dichloromethane (2:1, v/v) at 65°C for 4 h (Li *et al.*, 2011).

#### 4.2 Acidic catalysis

Because of the often high FFA content of microalgae, direct transesterification has been conducted mainly via homogeneous acidic catalysis. Acidic catalysts can convert FFAs into FAME, as opposed to soap formation by alkaline catalysts, as shown in equation 4 (Ehimen *et al.*, 2010):



In fact, when Nagle and Lemke (1990) compared the efficacies of acidic catalyst and alkaline catalyst, acidic catalysis resulted in a higher FAME yield than alkaline catalysis under the same reaction conditions. However, direct transesterification with acidic catalysts is weakened by the presence of water: the FAME yield from the direct transesterification of *Chlorella* biomass was reduced from 81.7% at a 0.7% (w/w, wet basis) water content to only 19.5% at a 73% water content (Ehimen *et al.*, 2010).

#### 4.3 Enzyme catalysis

To our knowledge, the only report of a direct method using enzyme catalysis is that of Tran *et al.* (2013). After *Chlorella vulgaris* ESP-31 biomass (water content 86%–91% [w/w, wet basis], oil content 14%–63% [w/w, dry basis]) was sonicated to disrupt the cell walls, the lipids were directly converted into FAME by using immobilized *Burkholderia* sp. C20 lipase as the catalyst. The lipase was immobilized on a hybrid nanomaterial (Fe<sub>3</sub>O<sub>4</sub>-SiO<sub>2</sub>) grafted to a long-chain alkyl group as a supporter (Liu *et al.*, 2012; Tran *et al.*, 2012). The immobilized lipase worked well with wet microalgal biomass. With this method, it is important that the microalgal biomass have a high lipid content to achieve >90% biodiesel conversion with a low biocatalyst loading and high lipase recycling efficiency.

#### 4.4 Supercritical solvent method

A catalyst-free method has recently been developed using supercritical methanol (Demirbas, 2009). This process is conducted at a high reaction temperature and pressure (Kusdiana and Saka, 2004). Supercritical methanol can form a single phase with lipids, in contrast to two phases under ambient pressures and temperatures. This can be achieved because the dielectric constant of methanol is decreased in the supercritical state. In the supercritical method, the reaction is achieved within very short times of 2–4 min, and FFA and TAG can be simultaneously esterified and transesterified. This method also has the possibility of reducing costs associated with drying microalgae because the reaction is not inhibited by high water content. When this method was used with wet algal biomass containing about 90% water content (w/w, wet basis), 90% FAME yield was reached (Patil *et al.*, 2011b). A two-step process was also reported (Levine *et al.*, 2010): in the first step, wet microalgal biomass was reacted to hydrolyze intracellular lipids to FFA under subcritical conditions, and in the second step, the wet FFA-rich solids were subjected to supercritical direct transesterification. However, as it now stands, supercritical solvent methods may be unsuitable owing to poor process economics and safety concerns (Marchetti and Errazu, 2008).

#### 4.5 Microwave- and ultrasound-assisted methods

Microwave radiation influences the motions of molecules with a dipole moment. In microwave-assisted transesterification, methanol absorbs microwave radiation, rapidly reorienting its dipole. This enables the destruction of the methanol–lipid interface (Patil *et al.*, 2011a). The oscillating microwave field tends to move continuously toward the polar ends of molecules or ions (Azcan and Danisman, 2008). Consequently, collisions between moving molecules produce heat (Marra *et al.*, 2010) that can shorten the reaction time (Lidström *et al.*, 2001). Ultrasonic technology is also an effective method to enhance mass transfer between immiscible phases (Pan *et al.*, 2002). The ultra-high-frequency sound waves compress and stretch the molecular spacing of the medium through which they pass, and the molecules remain continuously vibrating with the formation of fine microbubbles or micro-cavities (Ji *et al.*, 2006; Lam *et al.*, 2010). Generally, homogeneous alkaline catalysts have been used in these approaches.

## 5. Conclusions

Biodiesel production from microalgal lipids holds great potential for a new energy industry because some microalgae have high productivity of biomass and oil. Two main approaches have been used to produce FAME from lipids: organic solvent extraction of lipids from microalgae followed by transesterification of the lipid extracts, and direct transesterification from microalgal biomass. The former has the disadvantage of the increased cost caused by the use of organic solvent. In contrast, the latter can reduce the process energy considerably, because it produces biodiesel without the need for organic solvent. In addition, other research has shown that direct transesterification can convert phospholipids, as well as TAGs and FFAs, into FAME. Therefore, direct transesterification, via many approaches, offers promise for biodiesel production from microalgae. The key considerations to commercialization are the process energy and the effect of water. Further research is required to develop a cost-effective technology that is less affected by the presence of water.

## 6. Acknowledgments

The authors are grateful to Dr. Takaaki Maekawa and Mrs. Nobuko Akamatsu of the Research Institute of the Tsukuba Bio-tech Corporation for financial support.

## References

- Al-Zuhair, S., 2007. Production of biodiesel: possibilities and challenges. *Biofuel. Bioprod. Bior.* 1, 57–66.
- Azcan, N., Danisman, A., 2008. Microwave assisted transesterification of rapeseed oil. *Fuel* 87, 1781–1788.
- Bozbas, K., 2008. Biodiesel as an alternative motor fuel: Production and policies in the European Union. *Renew. Sustain. Energ. Rev.* 12, 542–552.
- Brennan, L., Owende, P., 2010. Biofuels from microalgae—A review of technologies for production, processing, and extractions of biofuels and co-products. *Renew. Sustain. Energ. Rev.* 14, 557–577.
- Chisti, Y., 2007. Biodiesel from microalgae. *Biotechnol. Adv.* 25, 294–306.
- Courchesne, N.M.D., Parisien, A., Wang, B., Lan, C.Q., 2009. Enhancement of lipid production using biochemical, genetic and transcription factor engineering approaches. *J. Biotechnol.* 141, 31–41.
- Demirbas, A., 2002. Diesel fuel from vegetable oil via transesterification and soap pyrolysis. *Energ. Source.* 24, 835–841.
- Demirbas, A., 2009. Biodiesel from waste cooking oil via base-catalytic and supercritical methanol transesterification. *Energ. Conv. Manag.* 50, 923–927.
- Dufreche, S., Hernandez, R., French, T., Sparks, D., Zappi, M., Alley, E., 2007. Extraction of lipids from municipal wastewater plant microorganisms for production of biodiesel. *J. Am. Oil Chem. Soc.* 84, 181–187.
- Ehimen, E.A., Sun, Z.F., Carrington, C.G., 2010. Variables affecting the *in situ* transesterification of microalgal lipids. *Fuel* 89, 677–684.
- Freedman, B., Butterfield, R., Pryde, E., 1986. Transesterification kinetics of soybean oil. *J. Am. Oil Chem. Soc.* 63, 1375–1380.
- Gordon, R., Losic, D., Tiffany, M.A., Nagy, S.S., Sterrenburg, F.A.S., 2009. The Glass menagerie: diatoms for novel applications in nanotechnology. *Trends Biotechnol.* 27, 116–127.
- Graboski, M.S., McCormick, R.L., 1998. Combustion of fat and vegetable oil derived fuels in diesel engines. *Prog. Energ. Combust. Sci.* 24, 125–164.
- Haas, M., Scott, K., Foglia, T., Marmer, W., 2007. The general applicability of *in situ* transesterification for the production of fatty acid esters from a variety of feedstocks. *J. Am. Oil Chem. Soc.* 84, 963–970.
- Hu, Q., Sommerfeld, M., Jarvis, E., Ghirardi, M., Posewitz, M., Seibert, M., Darzins, A., 2008. Microalgal triacylglycerols as feedstocks for biofuel production: perspectives and advances. *Plant J.* 54, 621–639.
- Huang, G., Chen, F., Wei, D., Zhang, X., Chen, G., 2010. Biodiesel production by microalgal biotechnology. *Appl. Energ.* 87, 38–46.
- Janaun, J., Ellis, N., 2010. Perspectives on biodiesel as a sustainable fuel. *Renew. Sustain. Energ. Rev.* 14, 1312–1320.
- Ji, J., Wang, J., Li, Y., Yu, Y., Xu, Z., 2006. Preparation of biodiesel with the help of ultrasonic and hydrodynamic cavitation. *Ultrasonics* 44, Suppl. e411–e414.
- Johnson, M.B., Wen, Z., 2009. Production of biodiesel fuel from the microalga *Schizochytrium limacinum* by direct transesterification of algal biomass. *Energ. Fuel.* 23, 5179–5183.
- Khan, S.A., Rashmi, Hussain, M.Z., Prasad, S., Banerjee, U.C., 2009. Prospects of biodiesel production from microalgae in India. *Renew. Sustain. Energ. Rev.* 13, 2361–2372.
- Knuckey, R.M., Brown, M.R., Robert, R., Frampton, D.M.F., 2006. Production of microalgal concentrates by flocculation and their assessment as aquaculture feeds. *Aquacult. Eng.* 35, 300–313.
- Kusdiana, D., Saka, S., 2004. Effects of water on biodiesel fuel production by supercritical methanol treatment. *Bioresour. Technol.* 91, 289–295.
- Lam, M.K., Lee, K.T., Mohamed, A.R., 2010. Homogeneous, heterogeneous and enzymatic catalysis for transesterification of high free fatty acid oil (waste cooking oil) to biodiesel: a review. *Biotechnol. Adv.* 28, 500–518.
- Lardon, L., Hélias, A., Sialve, B., Steyer, J., Bernard, O., 2009. Life-cycle assessment of biodiesel production from microalgae. *Environ. Sci. Technol.* 43, 6475–6481.
- Lee, R.E., 1980. *Phycology*. Cambridge University Press, New York.
- Lepage, G., Roy, C.C., 1984. Improved recovery of fatty acid

- through direct transesterification without prior extraction or purification. *J. Lipid Res.* 25, 1391–1396.
- evine, R.B., Pinnarat, T., Savage, P.E., 2010. Biodiesel production from wet algal biomass through *in situ* lipid hydrolysis and supercritical transesterification. *Energ. Fuel.* 24, 5235–5243.
- Lewis, T., Nichols, P.D., McMeekin, T.A., 2000. Evaluation of extraction methods for recovery of fatty acids from lipid-producing microheterotrophs. *J. Microbiol. Methods* 43, 107–116.
- Li, Y., Lian, S., Tong, D., Song, R., Yang, W., Fan, Y., Qing, R., Hu, C., 2011. One-step production of biodiesel from *Nannochloropsis* sp. on solid base Mg-Zr catalyst. *Appl. Energ.* 88, 3313–3317.
- Lidström, P., Tierney, J., Wathey, B., Westman, J., 2001. Microwave assisted organic synthesis—a review. *Tetrahedron* 57, 9225–9283.
- Liu, C., Huang, C., Wang, Y., Lee, D., Chang, J., 2012. Biodiesel production by enzymatic transesterification catalyzed by *Burkholderia* lipase immobilized on hydrophobic magnetic particles. *Appl. Energ.* 100, 41–46.
- Lorenz, R.T., Cysewski, G.R., 2000. Commercial potential for *Haematococcus* microalgae as a natural source of astaxanthin. *Trends Biotechnol.* 18, 160–167.
- Mallick, N., 2002. Biotechnological potential of immobilized algae for wastewater N, P and metal removal: a review. *Biometals* 15, 377–390.
- Marchetti, J.M., Errazu, A.F., 2008. Technoeconomic study of supercritical biodiesel production plant. *Energ. Convers. Manage.* 49, 2160–2164.
- Marra, F., De Bonis, M.V., Ruocco, G., 2010. Combined microwaves and convection heating: a conjugate approach. *J. Food Eng.* 97, 31–39.
- Mata, T.M., Martins, A.A., Caetano, N.S., 2010. Microalgae for biodiesel production and other applications: a review. *Renew. Sustain. Energ. Rev.* 14, 217–232.
- Meher, L.C., Vidya Sagar, D., Naik, S.N., 2006. Technical aspects of biodiesel production by transesterification—a review. *Renew. Sustain. Energ. Rev.* 10, 248–268.
- Meng, X., Yang, J., Xu, X., Zhang, L., Nie, Q., Xian, M., 2009. Biodiesel production from oleaginous microorganisms. *Renew. Energ.* 34, 1–5.
- Minowa, T., Yokoyama, S., Kishimoto, M., Okakura, T., 1995. Oil production from algal cells of *Dunaliella tertiolecta* by direct thermochemical liquefaction. *Fuel.* 74, 1735–1738.
- Molina Grima, E., Belarbi, E.-H., Acien Fernández, F.G., Robles Medina, A., Chisti, Y., 2003. Recovery of microalgal biomass and metabolites: process options and economics. *Biotechnol. Adv.* 20, 491–515.
- Mondala, A., Liang, K., Toghiani, H., Hernandez, R., French, T., 2009. Biodiesel production by *in situ* transesterification of municipal primary and secondary sludges. *Bioresour. Technol.* 100, 1203–1210.
- Nagle, N., Lemke, P., 1990. Production of methyl ester fuel from microalgae. *Appl. Biochem. Biotechnol.* 24–25, 355–361.
- Ohlogge, J., Browse, J., 1995. Lipid biosynthesis. *Plant Cell* 7, 957–970.
- Pan, X., Niu, G., Liu, H., 2002. Comparison of microwave-assisted extraction and conventional extraction techniques for the extraction of tanshinones from *Salvia miltiorrhiza* Bunge. *Biochem. Eng. J.* 12, 71–77.
- Park, P.W., Goins, R.E., 1994. *In situ* preparation of fatty acid methyl esters for analysis of fatty acid composition in foods. *J. Food Sci.* 59, 1262–1266.
- Patil, V., Tran, K.-Q., Giselrod, H.R., 2008. Towards sustainable production of biofuels from microalgae. *J. Mol. Sci.* 9, 1188–1195.
- Patil, P.D., Gude, V.G., Mannarswamy, A., Cooke, P., Munson-McGee, S., Nirmalakhandan, N., Lammers, P., Deng, S., 2011a. Optimization of microwave-assisted transesterification of dry algal biomass using response surface methodology. *Bioresour. Technol.* 102, 1399–1405.
- Patil, P.D., Gude, V.G., Mannarswamy, A., Deng, S., Cooke, P., Munson-McGee, S., Rhodes, I., Lammers, P., Nirmalakhandan, N., 2011b. Optimization of direct conversion of wet algae to biodiesel under supercritical methanol conditions. *Bioresour. Technol.* 102, 118–122.
- Peterson, C.L., Feldman, M., Korus, R., Auld, D.L., 1991. Batch type transesterification process for winter rape oil. *Appl. Eng. Agric.* 7, 711–716.
- Richmond, A., 2004. Handbook of microalgal culture: biotechnology and applied phycology. Blackwell Science Ltd., Oxford.
- Rodríguez-Ruiz, J., Belarbi, E., Sánchez, J., Alonso, D., 1998. Rapid simultaneous lipid extraction and transesterification for fatty acid analyses. *Biotechnol. Tech.* 12, 689–691.
- Salih, F.M., 2011. Microalgae tolerance to high concentrations of carbon dioxide: a review. *J Environ. Prot.* 2, 648–654.
- Siler-Marinkovic, S., Tomasevic, A., 1998. Transesterification of sunflower oil *in situ*. *Fuel* 77, 1389–1391.
- Tran, D., Chen, C., Chang, J., 2012. Immobilization of *Burkholderia* sp. lipase on a ferric silica nanocomposite for biodiesel production. *J. Biotechnol.* 158, 112–119.
- Tran, D., Chen, C., Chang, J., 2013. Effect of solvents and oil content on direct transesterification of wet oil-bearing microalgal biomass of *Chlorella vulgaris* ESP-31 for biodiesel synthesis using immobilized lipase as the biocatalyst. *Bioresour. Technol.* 135, 213–221.
- Velasquez-Orta, S.B., Lee, J.G.M., Harvey, A., 2012. Alkaline *in situ* transesterification of *Chlorella vulgaris*. *Fuel* 94, 544–550.
- Velasquez-Orta, S.B., Lee, J.G.M., Harvey, A.P., 2013. Evaluation of FAME production from wet marine and freshwater microalgae by *in situ* transesterification. *Biochem. Eng. J.* 76, 83–89.
- Vicente, G., Bautista, L.F., Rodríguez, R., Gutiérrez, F.J., Sádaba, I., Ruiz-Vázquez, R.M., Torres-Martínez, S., Garre, V., 2009. Biodiesel production from biomass of an oleaginous fungus. *Biochem. Eng. J.* 48, 22–27.
- Wahlen, B.D., Willis, R.M., Seefeldt, L.C., 2011. Biodiesel production by simultaneous extraction and conversion of total lipids from microalgae, cyanobacteria, and wild mixed-cultures. *Bioresour. Technol.* 102, 2724–2730.
- Wang, B., Li, Y., Wu, N., Lan, C., 2008. CO<sub>2</sub> bio-mitigation using microalgae. *Appl. Microbiol. Biotechnol.* 79, 707–718.
- Wuebbles, D.J., Jain, A.K., 2001. Concerns about climate



- change and the role of fossil fuel use, Fuel Process Technol. 71, 99-119.
- Xu, R., Mi, Y., 2011. Simplifying the process of microalgal biodiesel production through *in situ* transesterification technology. J. Am. Oil Chem. Soc. 88, 91-99.
- Zhao, B., Zhang, Y., Xiong, K., Zhang, Z., Hao, X., Liu, T., 2011. Effect of cultivation mode on microalgal growth and CO<sub>2</sub> fixation. Chem. Eng. Res. Design. 89, 1758-1762.